


DRESSWALLSTRIPES

PROFILES

PROFILI


CR50



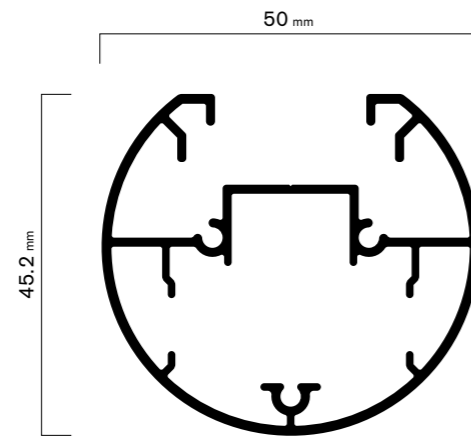

- Extruded aluminum profile, circular section w/ 50 mm Diameter and 45.2 mm Height
- Weight 0.853 kg/mt
- Minimum interaxial spacing pitch 70 mm (20 mm spacing)
- Maximum stripe length 6 mt, multiple junctions possible through retractable intersection to grant easy removal of every single stripe
- Optional stripe closing cap thickness 1.5 mm

- Profilo estruso in alluminio a sezione tonda diametro 50 mm altezza 45,2 mm
- Peso 0,853 Kg/m
- Passo minimo interasse 70 mm (Spaziatura 20 mm)
- Lunghezza massima doga 6 m giuntabile a seguire con innesto retraibile per garantire la facile rimozione di ogni singola barra
- Tappo chiusura di testa opzionale spessore 1,5 mm

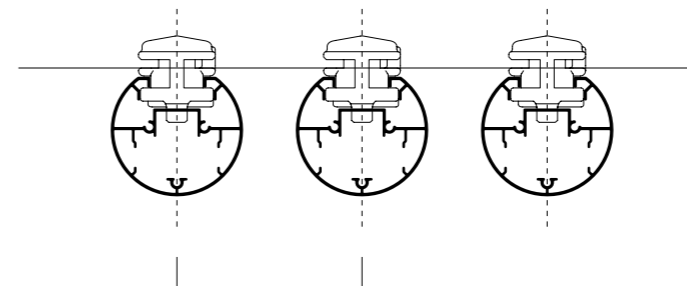

Free pitch defined during project. Minimum interaxial pitch 70 mm, 20 mm spacing.
Passo libero definito in fase di progetto. Passo minimo interasse 70 mm, spaziatura 20 mm.