


DRESSWALLSTRIPES

PROFILES

PROFILI


SQ35/100-L



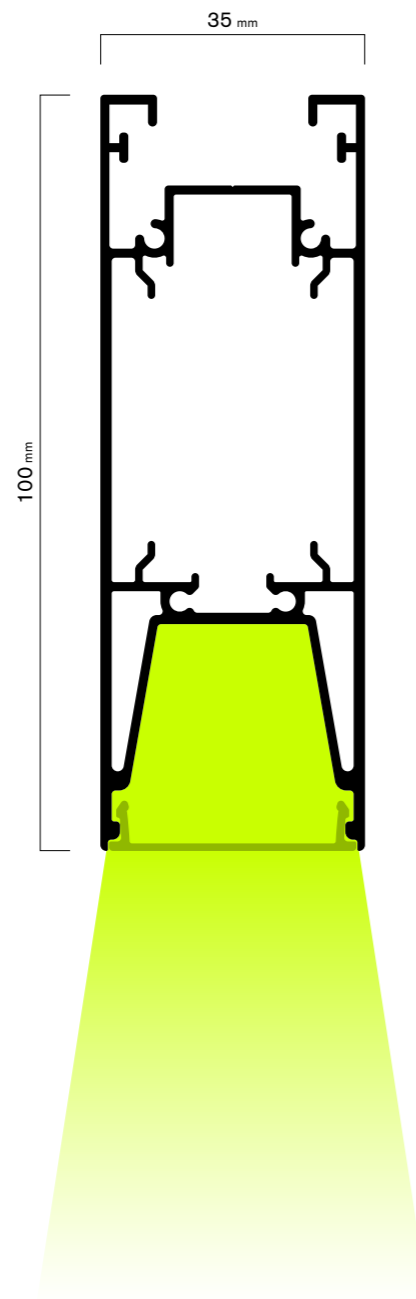

- Extruded aluminum profile, rectangular section w/ 35 mm Base and 100 mm Height
- Weight 1.493 kg/mt
- Minimum interaxial spacing pitch 65 mm (30 mm spacing)
- Maximum stripe length 6 mt, multiple junctions possible through retractable intersection to grant easy removal of every single stripe
- Optional stripe closing cap thickness 1.5 mm
- Dimmable LED light with dynamic warmth from 2700k to 5000k, adjustable from smartphone app

- Profilo estruso in alluminio a sezione rettangolare base 35 mm altezza 100mm
- Peso 1,493 Kg/m
- Passo minimo interasse 65 mm (Spaziatura 30 mm)
- Lunghezza massima doga 6 m giuntabile a seguire con innesto retraibile per garantire la facile rimozione di ogni singola barra
- Tappo chiusura di testa opzionale spessore 1,5 mm
- Luce LED dimerata e dinamica da 2700k a 5000k con App gestibile da Smartphone

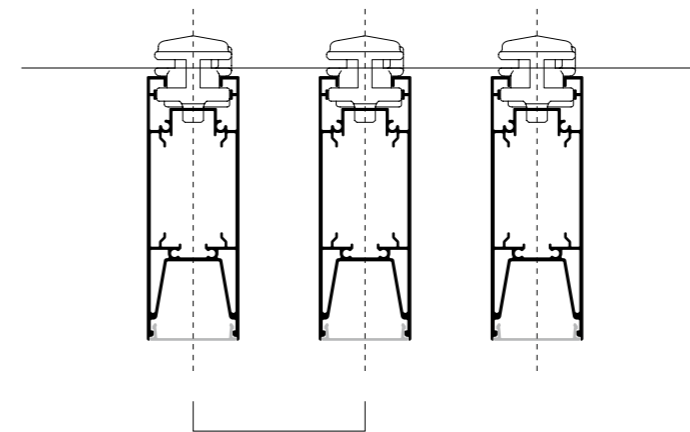

Free pitch defined during project. Minimum interaxial pitch 65 mm, 30 mm spacing.
 Passo libero definito in fase di progetto. Passo minimo interasse 65 mm, spaziatura 30 mm.