


DRESSWALL STRIPES

PROFILES

PROFILI


# SQ35/35-L



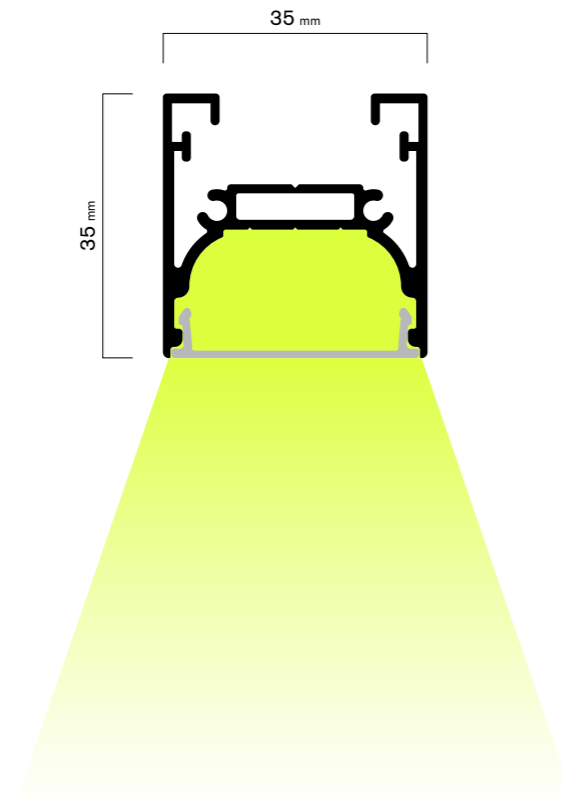

- Extruded aluminium profile, squared section with 35 mm Width and 35 mm Height
- Weight 0.67 kg/mt
- Minimum interaxial spacing pitch 65 mm (30 mm spacing)
- Maximum slat length 6 mt, multiple junctions possible through retractable intersection to grant easy removal of every single slat
- Optional slat closing cap thickness 1.5 mm
- Dimmable LED light with dynamic temperature from 3000K to 5000K or RGB, manageable via smart device app

- Profilo estruso in alluminio a sezione quadrata base 35 mm altezza 35 mm
- Peso 0,67 Kg/m
- Passo minimo interasse 65 mm (Spaziatura 30 mm)
- Lunghezza massima doga 6 m giuntabile a seguire con innesto retraibile per garantire la facile rimozione di ogni singola barra
- Tappo chiusura di testa opzionale spessore 1,5 mm
- Luce LED dimmerabile con temperatura dinamica da 3000K a 5000K o RGB, gestibile da app su dispositivo smart

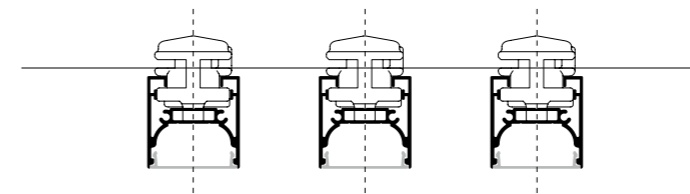

Free pitch defined during project. Minimum interaxial pitch 65 mm, 30 mm spacing.  
 Passo libero definito in fase di progetto. Passo minimo interasse 65 mm, spaziatura 30 mm.